# ADAPT 500 Series

The 2nd generation ADAPT 500 features a new headband and softer earpads for long-term wearing comfort. A foldable boom arm optimizes voice pick-up while ANC reduces background noise. Switch between two Bluetooth<sup>®</sup> devices using multi-point connectivity and benefit from up to 41 hours of talk time.

We are rebranding from EPOS | SENNHEISER to EPOS branding on our products. During the transition period the same product may exist in both versions Certified for Microsoft Teams







Fact Sheet

## Key Features

### Concentrate anytime, anywhere with ANC

4 ANC microphones reduce background noise to increase work focus, together with plush ear pads for good sound isolatio

### Get clearer calls on demand

The sleek, foldable boom arm and 2 advanced microphones optimize voice pick up for clearer office and mobile calls

See more at eposaudio.com/adapt-500

Slide the boom arm away
for a sleek look
The smart and practical boom

arm design seamlessly integrates into the earcup and can be retracted when not on a call

#### Enjoy all-day wearing comfort

Low impact headband and softer earpads remove potential pressure points ensuring a comfortable fit in the office or on the move

#### Ensure clear calls with UC certified solution


Certified for Microsoft Teams and optimized for UC

Fact Sheet

## What's in the Box



# How to Use the **ADAPT 500**

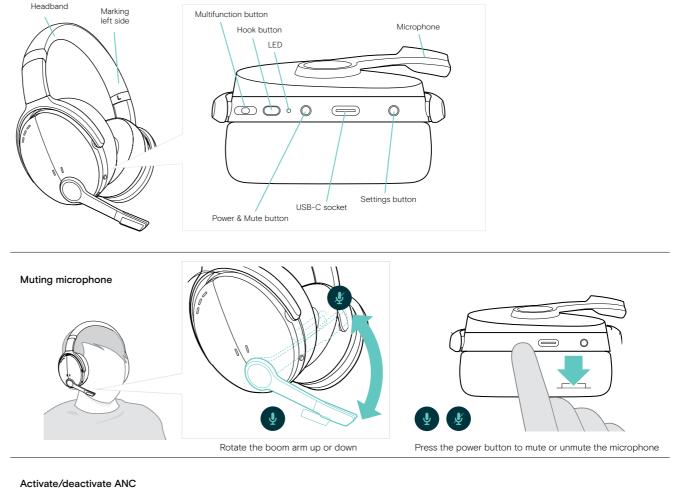



## Additional benefits & features

### ....

devices

Switch effortlessly between your favorite

#### Up to 46 hours battery life

Reliable performance wherever and however you work



#### Store easily with portable carry case

Compact carry case includes USB dongle and USB-C cable

connects to your PC

#### Launch Microsoft Teams instantly

Enjoy multi-point connectivity via

Bluetooth® to mobile and softphone simultaneously. BTD 800 USB-A dongle

Dedicated button for Microsoft Teams via BTD 800 USB-A



#### Stay in touch with your surroundings

EPOS Voice<sup>™</sup> technology enables you to interact without removing the headset

## Product data

1/3

| General                       |   |  |
|-------------------------------|---|--|
| -<br>Wearing style            | On-ear, double-sided headband   |  |
| Headset weight                | 232 g / 8 oz  |  |
| Connectivity                  | Bluetooth® 5.0, USB cable with USB-C connect  |  |
| Supported codecs              | SBC, AAC, USB-C, aptX™  |  |
| Warranty                      | 2 years   |  |
| Audio                         |   |  |
| Speaker frequency response    | 20 - 20,000 Hz  |  |
| Microphone type               | 2 beamforming MEMS microphones  |  |
| Microphone frequency response | 100 - 10,000 Hz   |  |
| Noise cancellation            | Hybrid ANC technology with 4 microphones  |  |
| Technical                     |   |  |
| Charging time                 | 3 hours 40 minutes  |  |
| Standby time                  | Up to 81 days   |  |
| Battery time                  | Listening time: up to 46 hours. Talking time: up to 41 hours*<br>Listening time: up to 24 hours. Talking time: up to 24 hours** |  |
| Range                         | Up to 25 m / 82 ft (device dependent)   |  |

## Product data

2/3

| Product variants   | What's in the box   |  |
|--|---|--|
| ADAPT 560 II   | ADAPT 560 II headset, BTD 800 USB-A dongle, USB-A cable with USB-C connector, carry case, compliance sheet, safety guide  |  |
| ADAPT 561 II   | ADAPT 561 II headset, BTD 800 USB-C dongle, USB-C cable with USB-C connector, carry case, compliance sheet, safety guide  |  |
| Software   |   |  |
| EPOS devices can be managed with following Software solutions: |   |  |
| EPOS Connect   | Conduct firmware updates and configure headsets for personal audio preferences. EPOS Connect works for Windows, Mac <sup>®</sup> and VDI/Thin client environments:<br>eposaudio.com/software-epos-connect |  |
| EPOS Manager   | Manage, update and configure EPOS audio devices from any location - For both cloud and on-premises solutions: eposaudio.com/software-epos-mai   |  |

## Product data

3/3

| Product                          | Connects to                 | Certifications   | EAN code         | UPC code        |
|----------------------------------|-----------------------------|--|------------------|-----------------|
| ADAPT 560 II<br>Art. no. 1001160 | Softphone/PC mobile devices | Optimized for UC and certified for Microsoft<br>Teams***, Zoom, Google Meet, Webex by Cisco<br>and Avaya | 57 14708 00962 7 | 8 40064 40962 9 |
| ADAPT 561 II<br>Art. no. 1001170 | Softphone/PC mobile devices | Optimized for UC and certified for Microsoft<br>Teams*** Zoom, Google Meet, Webex by Cisco<br>and Avaya  | 57 14708 00974 0 | 8 40064 40974 2 |

\*\*\* Microsoft Teams certification applies when USB dongle or cable is connected to PC or Mac<sup>®</sup>

## Spare parts

1/1

| Product              | Art. no. | Description   | EAN code         | UPC code        |
|----------------------|----------|---|------------------|-----------------|
| Carry case           | 1000258  | Carry case for ADAPT 500 headsets for easy storage  | 57 14708 00059 4 | 8 40064 40059 6 |
| USB-C to USB-A cable | 1000211  | USB-C to USB-A cable. Cable length 1.2 meter  | 57 14708 00012 9 | 8 40064 40012 1 |
| USB-C to USB-C cable | 1000304  | USB-C to USB-C cable. Cable length 1.5 meter  | 57 14708 00105 8 | 8 40064 40105 0 |
| USB-A dongle         | 1000227  | The USB dongle provides connection to all<br>Bluetooth <sup>®</sup> devices in the ADAPT Series | 57 14708 00028 0 | 8 40064 40028 2 |
| USB-C dongle         | 1000206  | Connect any EPOS Bluetooth® audio device quickly and easily to your PC or Mac and tablet        | 57 14708 00007 5 | 8 40064 40007 7 |
| <br>Earpads          | 1000880  | Spare earpads in black leatherette  | 57 14708 00682 4 | 8 40064 40682 6 |

## Appendix

EPOS ActiveGard® technology

EU Noise at Work Limiter®

#### 1/1

| Additional product data    |  |  |  |  |
|----------------------------|--|--|--|--|
| Color                      | Black  |  |  |  |
| EPOS Voice™ Technology     | For a clear and natural listening experience               |  |  |  |
| Sound pressure level (SPL) | Max. 115 dB - Limited by EPOS ActiveGard® technology       |  |  |  |
| Sound enhancement profiles | Automatically adapt and optimize sound for both communicat |  |  |  |

Automatically adapt and optimize sound for both communication and multimedia

Protects users against acoustic injury caused by sudden sound burst on the line

Enhanced audio protection preventing listening fatigue, average 85 dB over a workday